## (19) World Intellectual Property Organization International Bureau



## HOLE WITH THE TAX OF T

(43) International Publication Date 30 September 2004 (30.09.2004)

PCT

## (10) International Publication Number WO 2004/084157 A1

(51) International Patent Classification7: 23/40, A63H 19/36, 33/42

G09B 25/06.

(21) International Application Number:

PCT/AU2004/000318

(22) International Filing Date: 17 March 2004 (17.03.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Detar 2003901195

17 March 2003 (17.03.2003) AU

(71) Applicant and

(72) Inventor: MASON, James, Peter [AU/AU]; 27 Howard Lane, Mount Barker, S.A. 5251 (AU).

(74) Agent: SCHULZE, Howard, K.; Collison & Co, 117 King William Street, Adelaide, S.A. 5000 (AU).

(81) Designated States (unless otherwise tralicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, II, IN, IS, IP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise Indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KB, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BQ, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, FL, FT, RO, SE, SI, SK, TR), OAPI (BR, BJ, CR, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guldance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MODELLING TERRAIN IMPROVEMENTS

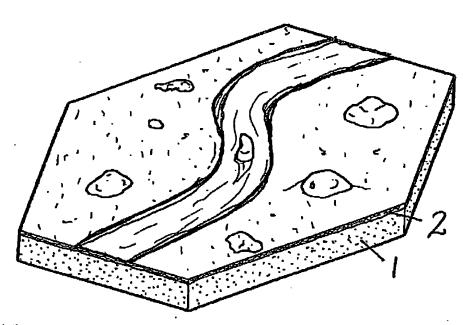

(57) Abstract: A terrain model element and method of manufacture which has a latex shaped layer molded in a drying mold and supported by a flexible foamed plastics material. In one instance the foamed plastics is molded directly into the latex layer.